




38 HAA

CLASS 1

An edge banded particle board core with aluminium foil base and surface covering to deliver improved fire retardancy.

We've invested in research and development to optimise our energy and raw material usage. This system is manufactured in our advanced, energy efficient manufacturing facility where 94% of the energy used is from sustainable sources.

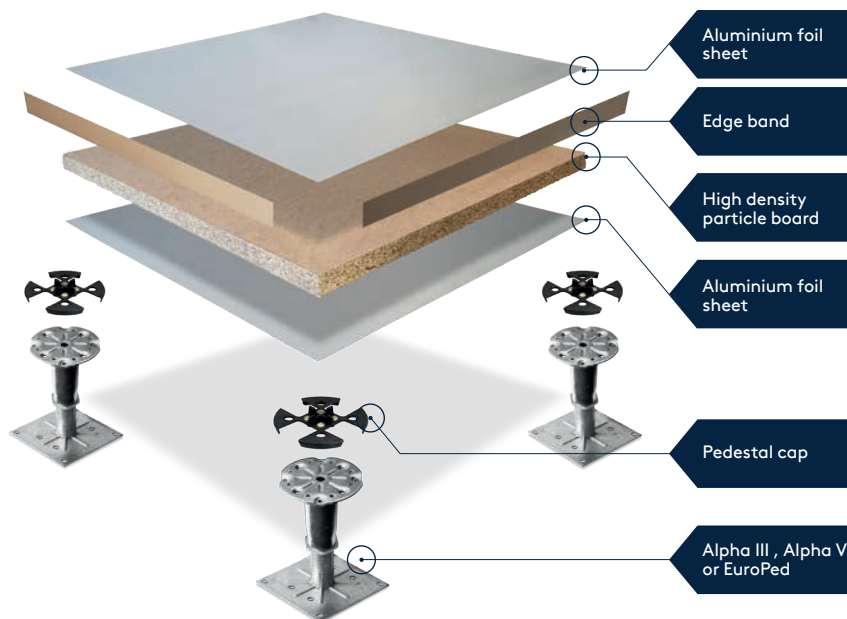


Panels	
Thickness:	38mm Nominal
System Weight:	31kg/m ² Nominal
Panel Size:	600mm x 600mm
Core Material:	High density particle board
Category:	Loose lay

System Performance	
Ultimate load:	4kN
Working load, safety factor 2:	2kN

System Sound Performance	
Airborne Insulation (Dnfw):	47 dB
Impact Insulation (Lnfw):	69 dB

Pedestal Options

Steel pedestals* coated with an environmentally friendly clear passivation.



Alpha III
for voids
>610mm

Pedestal Adhesive:

Standard or Acoustic pedestal adhesives available.



Underfloor Plenum

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

* Pivot-head adaptors and Nickel plated pedestals available upon request.

- Finished floor heights from 59mm to 1200mm are available using standard pedestals. For heights outside of this range alternative pedestals are available.
- The classifications given are based on the use of the Kingspan range of pedestals.

Kingspan Access Floors

Fabriekstraat 4, B-3670 Oudsbergen, Belgium

T: +32 11 79 33 00 E: KAFeurope@kingspan.com W: kingspan.com

