



Stanley Aluminum/Steel Perforated tile

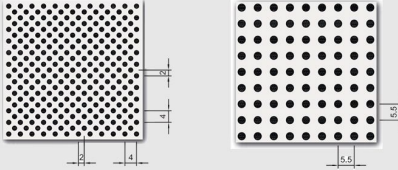

- Light weight
- Quick & easy install
- Antifungal
- Suppresses
- Disagreeable odors sale & environmental
- Green & none pollution

Aluminum/Steel suspended ceiling tiles

Thickness (mm) 	0.70mm and 0.60mm(+/-2mm) after painted
Dimension (mm) Additional sizes on request 	595mm*595mm 590mm*590mm 600mm*600mm 300mm*300mm
Edge 	Clip-in Square edge  Clip-in Beveled edge  Lay-in 
Acoustic Fiber	Available upon customer request
Fire Class 	A1
Corrosion Class	C
Deformation Class	1
Standard Class	TS EN 1396/A1
Paint 	Electrostatic powder coated paint, Pulver antibacterial when necessary min. 55 μ thickness, 20 surface gloss
Perforation	Plain/un-perforated  Perforated 
Color 	RAL 9016 , RAL 906 - Other RAL colors are available upon request