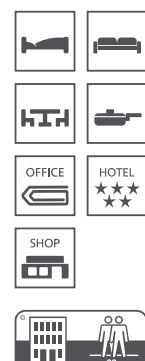


SWISS FLOORS

Laminate floor coverings according to EN 13329

HELVETIC

							STANDARD:  AC 5 / KI. 33	

Tolerances	Thickness, <i>t</i>	<i>t</i> average	≤ 0.50 mm	Width of the surface layer, <i>w</i>	<i>w</i> average	0.10 mm
		<i>t</i> max - <i>t</i> min	≤ 0.50 mm		<i>w</i> max - <i>w</i> min	0.20 mm
	Length, <i>l</i>	<i>l</i>	≤ 0.50 mm	Squareness, <i>q</i>	<i>q</i> max	0.20 mm
	Straightness, <i>s</i>	<i>s</i> max	0.30 mm/m	Height differences between elements, <i>h</i>	<i>h</i> average	0.10 mm
	Openings between elements, <i>o</i>	<i>o</i> average	0.15 mm		<i>h</i> max	0.15 mm
Dimensional variations and changes in relative humidity		<i>o</i> max	0.20 mm	Flatness, <i>f</i>	<i>f</i> w, concave	0.15 %
		Width: <i>w</i> average	0.9 mm		<i>f</i> w, convex	0.20 %
		Length: <i>l</i> average	0.9 mm		<i>f</i> l, concave	0.50 %
					<i>f</i> l, convex	1.00 %

Links	Care and maintenance :	www.eplf.com/en/services/information-material
	Instructions on laying:	www.eplf.com/en/services/information-material
	Product range, Informaterial :	www.swisskrono.ch/en/products/flooring.html
	Warranty conditions:	www.swisskrono.ch/en/products/flooring/your-guarantee.html
	Declaration of performance (DoP):	www.swisskrono.ch/dop



Swiss Made
Swiss Quality




Certified Quality and
Environmental
Management



Low CO₂-
production



Swiss Wood



Low formaldehyde
emissions



from sustainable forestry
(certificates can be provided upon request)



The Mark of
responsible forestry
FSC® C014666
Ask for FSC®
certified products



Association of European Pro-
ducers of Laminate Flooring



CERTIFIED BY
SCS Global Services

SWISS KRONO AG

Willisauerstrasse 37
CH-6122 Menznau

Phone +41 41 494 94 94
Fax +41 41 494 94 49

www.swisskrono.ch
info@swisskrono.ch